


*perfectMelt*



*exactaMelt*



*perfectMelt SE*



Download more information about this product

## perfectMelt XL

<b>Tank volume</b>	4/8 litres	14/20/30 litres
<b>Dimensions (H x W x T)</b>	580 x 570 x 390	660 x 710 x 390
<b>Melting rate max.</b>	4/8 litres/h	14/20/30 litres/h
<b>Delivery rate</b>	40 litres/h	40 litres/h
<b>Pump</b>	14 :1 piston pump	14 : 1 piston pump
	further pumps available on request	
<b>Pressure range of pump</b>	0,5 - 4,5 bar	0,5 - 4,5 bar
<b>Connections</b>	2 - 4 - 6 - 8 channels	2 - 4 - 6 channels
<b>Surrounding temperature</b>	5 °C - 45 °C	5 °C - 45 °C
<b>Temperatur range</b>	50 °C - 195 °C (HT230 °C)	50 °C - 195 °C (HT230 °C)
<b>Temperatur sensor</b>	Ni120 / NTC / PT100 / FeCu	
<b>Excess temp. shutdown</b>	hardware thermostat	hardware thermostat
	adjustable software	adjustable software
<b>Operating voltage</b>	3L/N/PE 400V	3L/N/PE 400V



Download more information about this product

## perfectMelt SE

<b>Tank volume</b>	4/8 litres
<b>Dimensions (H x W x T)</b>	524 x 607 x 332
<b>Melting rate max.</b>	4/8 litres/h
<b>Delivery rate</b>	30 litres/h
<b>Pump</b>	14 : 1 piston pump
<b>Pressure range of pump</b>	0,5 - 4,5 bar
<b>Connections</b>	2 or 4 channels
<b>Surrounding temperature</b>	5 °C - 45 °C
<b>Temperatur range</b>	45 °C - 195 °C
<b>Temperatur sensor</b>	Ni120 / NTC / PT100 / FeCu
<b>Excess temp. shutdown</b>	hardware thermostat
	adjustable software
<b>Operating voltage</b>	L/N/PE 230 V or 3L/N/PE 400V




**TANK SYSTEMS**  
HOTMELT SYSTEMS FOR INDUSTRY

**Hotmeltsystems**

**perfectMelt**

- Energy saving intelligence
- One-hand operation possible
- High precision flow control
- Heating safety, as required
- 2, 4, 6 or 8 hose connections
- Easy maintenance access







Download more information about this product

## exactaMelt standard

## XL

<b>Tank volume</b>	4 / 8 litres	14 / 20 / 30 litres
<b>Dimensions (H x W x T)</b>	585 x 575 x 445	660 x 710 x 455
<b>Melting rate max.</b>	4 / 8 litres/h	14 / 20 / 30 litres/h
<b>Delivery rate</b>	1 - 30 kg/h	1 - 30 kg/h
<b>Pump</b>	gear pump 5,1 / 7,3 ccm/U / further pumps available	
<b>Pressure range of pump</b>	0 - 50 bar	0 - 50 bar
<b>Connections</b>	2 - 4 - 6 - 8 channels	2 - 4 - 6 channels
<b>Surrounding temperature</b>	5 °C - 45 °C	5 °C - 45 °C
<b>Temperatur range</b>	50 °C - 195 °C (HT230 °C)	50 °C - 195 °C (HT230 °C)
<b>Temperatur sensor</b>	Ni120 / NTC / PT100 / FeCu	Ni120 / NTC / PT100 / FeCu
<b>Excess temp. shutdown</b>	hardware thermostat	hardware thermostat
	adjustable software	adjustable software
<b>Operating voltage</b>	3L/N/PE 400V	3L/N/PE 400V

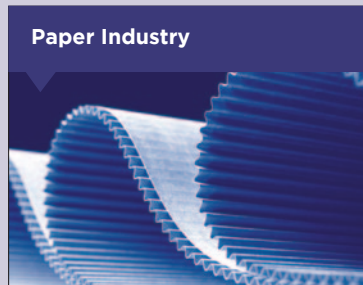

For more information about us please visit our website

Your local UES Partner



UES AG  
Breuershofstraße 48  
D-47807 Krefeld  
Tel +49(0)2151.7295-0  
info@ues-ag.net  
www.ues-ag.net

Visit us on

